

TOROIDAL CURRENT TRANSFORMERS

Model 126 Ratio to 5 (Window Size: 8.25" Dia.)


Application: Metering

Frequency: 50-400 Hz

Insulation Level: 600 Volts, 10Kv BIL Full Wave

Standards: CSA 66.1-06, CSA 66.2-06, IEEE C 57.13, and UL 506

- Terminals are brass studs No. 8-32 UNC with one flat washer, one lock washer and one nut each.
- Flexible leads are available for this case configuration. Flexible leads are UL 1015 105°C, C.S.A. approved #16 AWG, 24" long standard length. Non-Standard lengths are available upon request.
- Mounting Bracket Kits for the Model 126 SHT are sold separately. (P/N 1121A00018-2)
- Approximate weight: 3 lbs.

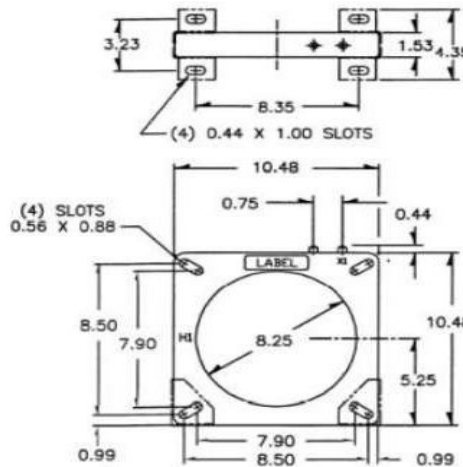

Catalog Number	Current Ratio	VA For ± 1% Class	ANSI Metering Class at 60 Hz.					Secondary Winding Resistance Ohms at 75°C	Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		at 30°C	at 55°C
126-401	400:5	4.0	0.6	1.2	2.4	4.8	4.8	0.116	2.0	2.0
126-501	500:5	7.5	0.6	0.6	1.2	2.4	2.4	0.145	2.0	2.0
126-601	600:5	10.0	0.6	0.6	1.2	1.2	2.4	0.173	2.0	2.0
126-751	750:5	15.0	0.3	0.6	0.6	1.2	1.2	0.217	2.0	1.5
126-801	800:5	20.0	0.3	0.3	0.6	0.6	1.2	0.231	2.0	1.5
126-102	1000:5	25.0	0.3	0.3	0.6	0.6	1.2	0.289	2.0	1.5
126-122	1200:5	40.0	0.3	0.3	0.3	0.6	0.6	0.347	1.5	1.33
126-152	1500:5	50.0	0.3	0.3	0.3	0.3	0.6	0.434	1.5	1.0
126-162	1600:5	50.0	0.3	0.3	0.3	0.3	0.6	0.462	1.5	1.0
126-202	2000:5	60.0	0.3	0.3	0.3	0.3	0.3	0.578	1.33	1.0
126-252	2500:5	75.0	0.3	0.3	0.3	0.3	0.3	0.904	1.0	0.8
126-302	3000:5	90.0	0.3	0.3	0.3	0.3	0.3	0.722	1.33	1.0
126-322	3200:5	95.0	0.3	0.3	0.3	0.3	0.3	0.770	1.33	1.0
126-352	3500:5	100.0	0.3	0.3	0.3	0.3	0.3	0.842	1.0	0.8
126-402	4000:5	125.0	0.3	0.3	0.3	0.3	0.3	0.962	1.0	0.8
126-502	5000:5	140.00	0.3	0.3	0.3	0.3	0.3	1.203	1.0	0.8
126-602	6000:5	140.00	0.3	0.3	0.3	0.3	0.3	1.203	1.0	0.8

Rev G 05 26 2026

TOROIDAL CURRENT TRANSFORMERS
Model 126 Ratio to 5 (Window Size: 8.25" Dia.)

