

THREE PHASE CURRENT TRANSFORMER


Model 3P60 | 3P61 | 3P62 Ratio to 5

Application: 3 Phase Relay, Metering and Motor Overload

Frequency: 50-400Hz

Insulation Levels: 600 Volts, 10kv BIL Full Wave

- Flexible leads available for all case configurations.
- Flexible leads are UL 1015 105 Deg. C, C.S.A. approved #10 AWG, 48" long standard length.
- Non-standard lengths are available upon request.

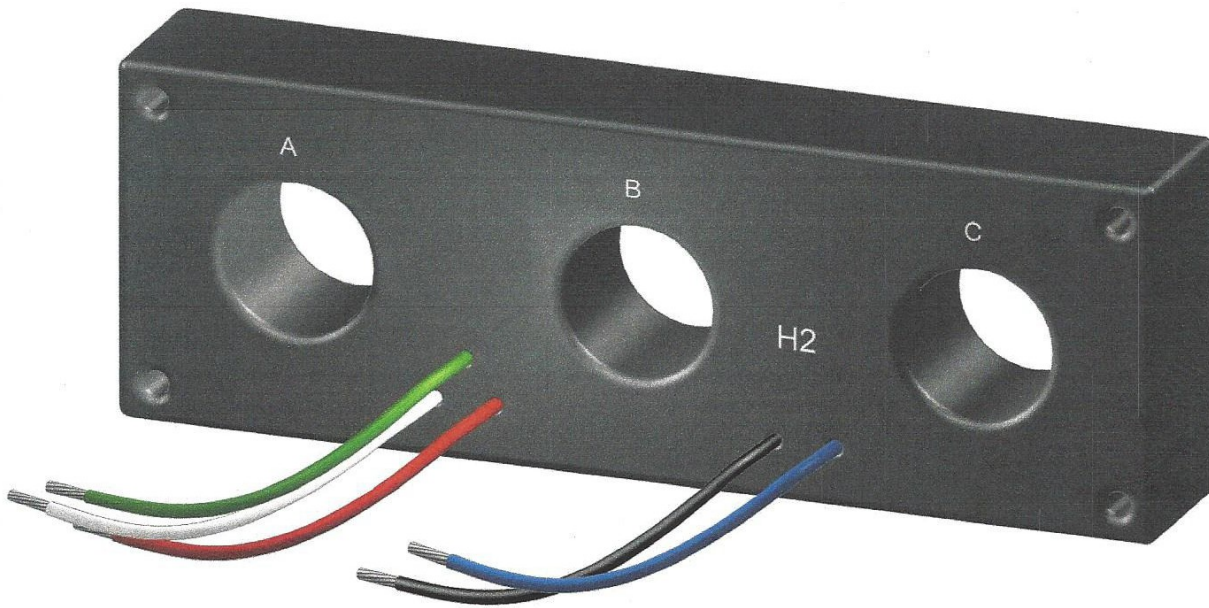


Part Number	Window Size	Ratio	Ansi Metering Class @ 60 Hz					Secondary Winding Resistance (Ohms @ 75 Deg. C)
			B0.1	B0.2	B0.5	B0.9	B1.8	
3P60-500	1.25	50:5	1.2	2.4	---	---	---	---
3P60-101	1.25	100:5	0.6	1.2	2.4	---	---	0.043
3P61-151	2.00	150:5	0.6	1.2	2.4	---	---	0.056
3P61-201	2.00	200:5	0.6	0.6	1.2	2.4	---	0.075
3P61-251	2.00	250:5	0.3	0.3	1.2	2.4	---	0.094
3P62-301	2.50	300:5	0.3	0.6	1.2	2.4	---	0.098
3P62-401	2.50	400:5	0.3	0.3	0.6	1.2	2.4	0.131
3P62-501	2.50	500:5	0.3	0.3	0.6	0.6	1.2	0.130
3P61-601	2.00	600:5	0.3	0.3	0.3	0.6	0.6	0.179
3P61-801	2.00	800:5	0.3	0.3	0.3	0.3	0.3	0.300
3P61-102	2.00	1000:5	0.3	0.3	0.3	0.3	0.3	0.382


Rev F 06 12 2024

THREE PHASE CURRENT TRANSFORMER

Model 3P60 | 3P61 | 3P62 Ratio to 5

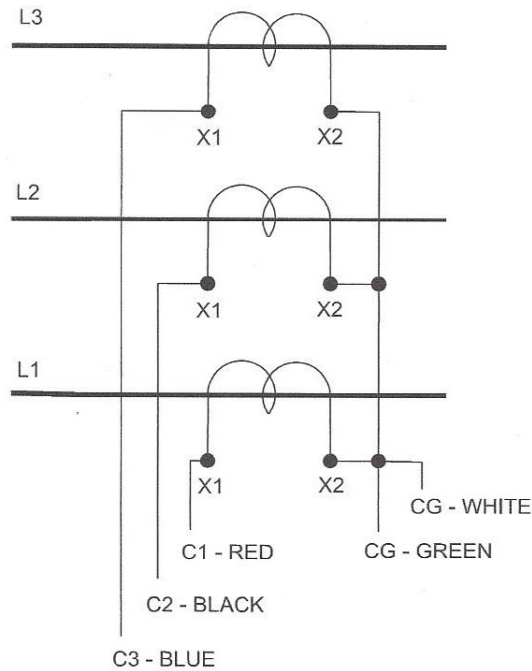



Part Number	Window Size	Ratio
3P60-500	1.25	50:5
3P60-101	1.25	100:5
3P61-151	2.00	150:5
3P61-201	2.00	200:5
3P61-251	2.00	250:5
3P62-301	2.50	300:5
3P62-401	2.50	400:5
3P62-501	2.50	500:5
3P61-601	2.00	600:5
3P61-801	2.00	800:5
3P61-102	2.00	1000:5

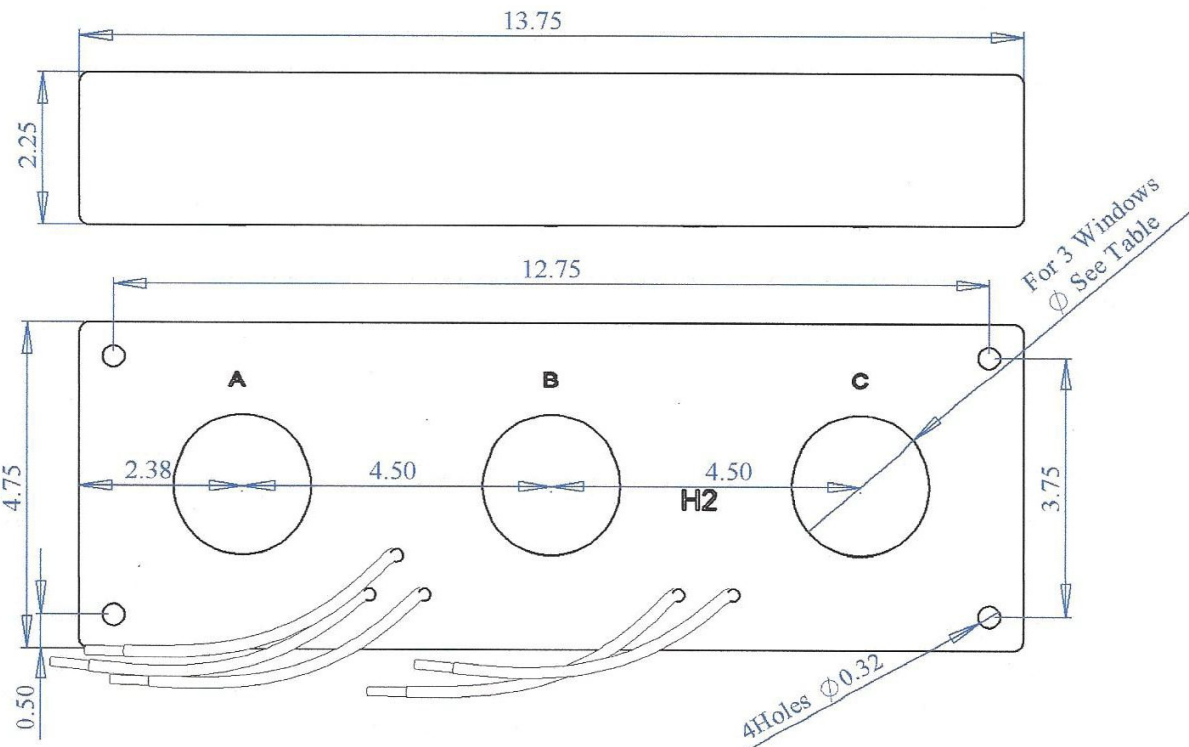

Rev F 06 12 2024

THREE PHASE CURRENT TRANSFORMER



Model 3P60 | 3P61 | 3P62 Ratio to 5

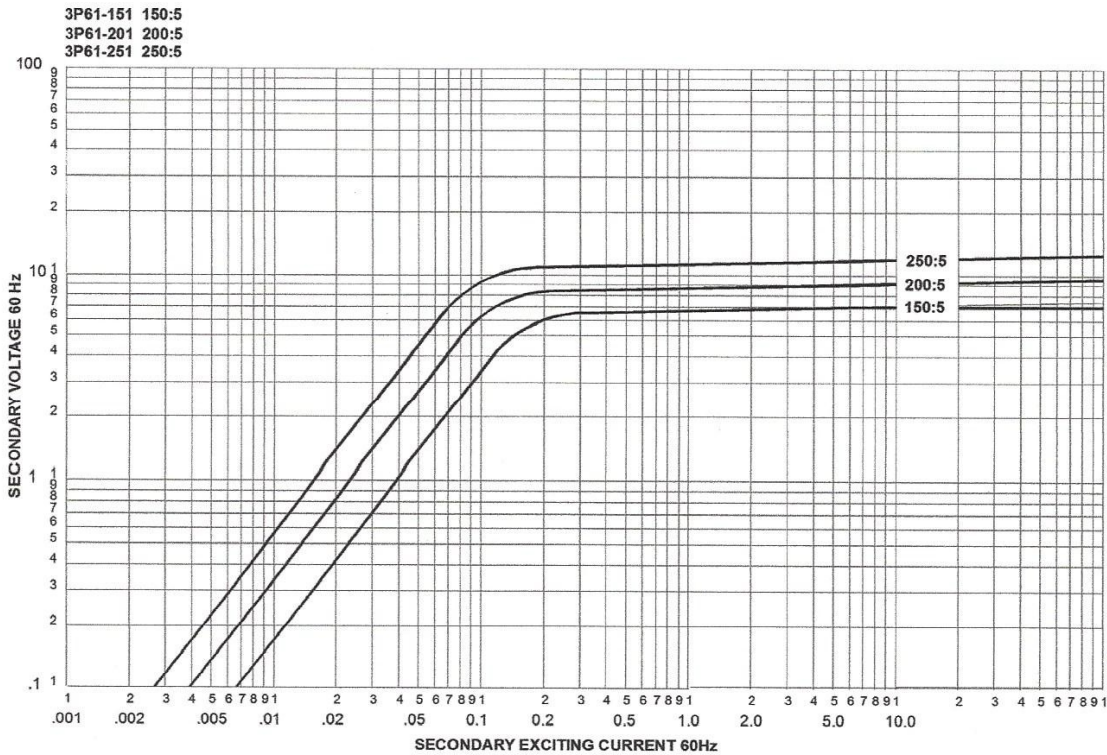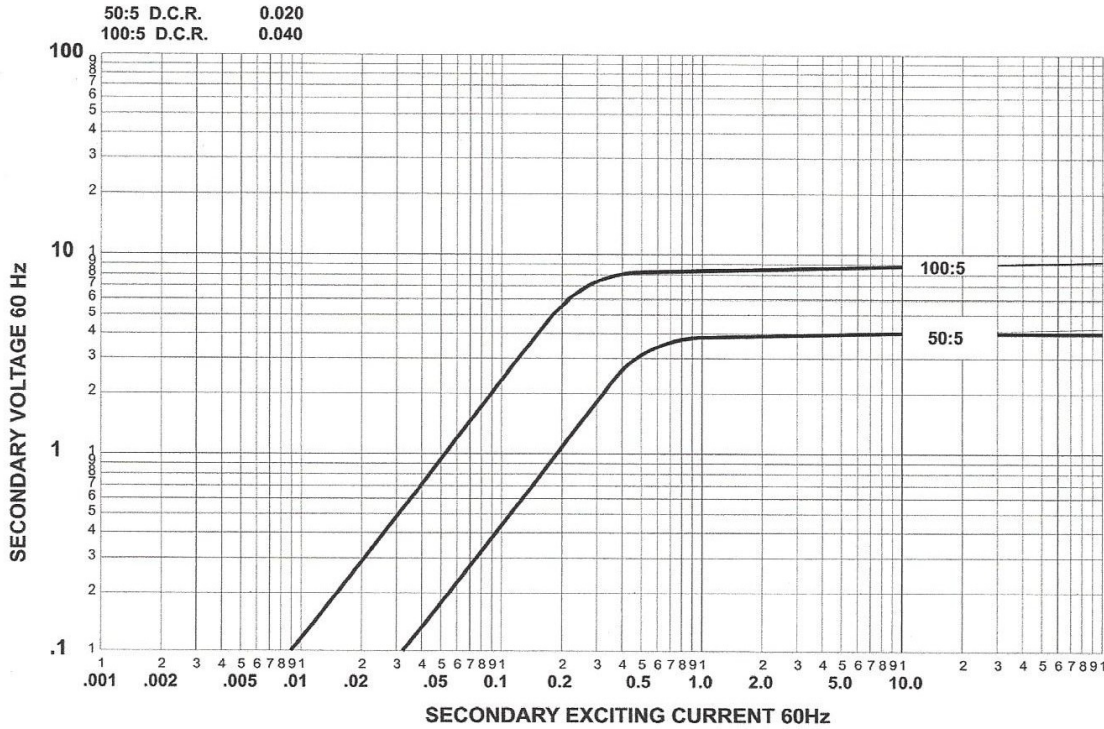

Rev F 06 12 2024

THREE PHASE CURRENT TRANSFORMER

Model 3P60 | 3P61 | 3P62 Ratio to 5

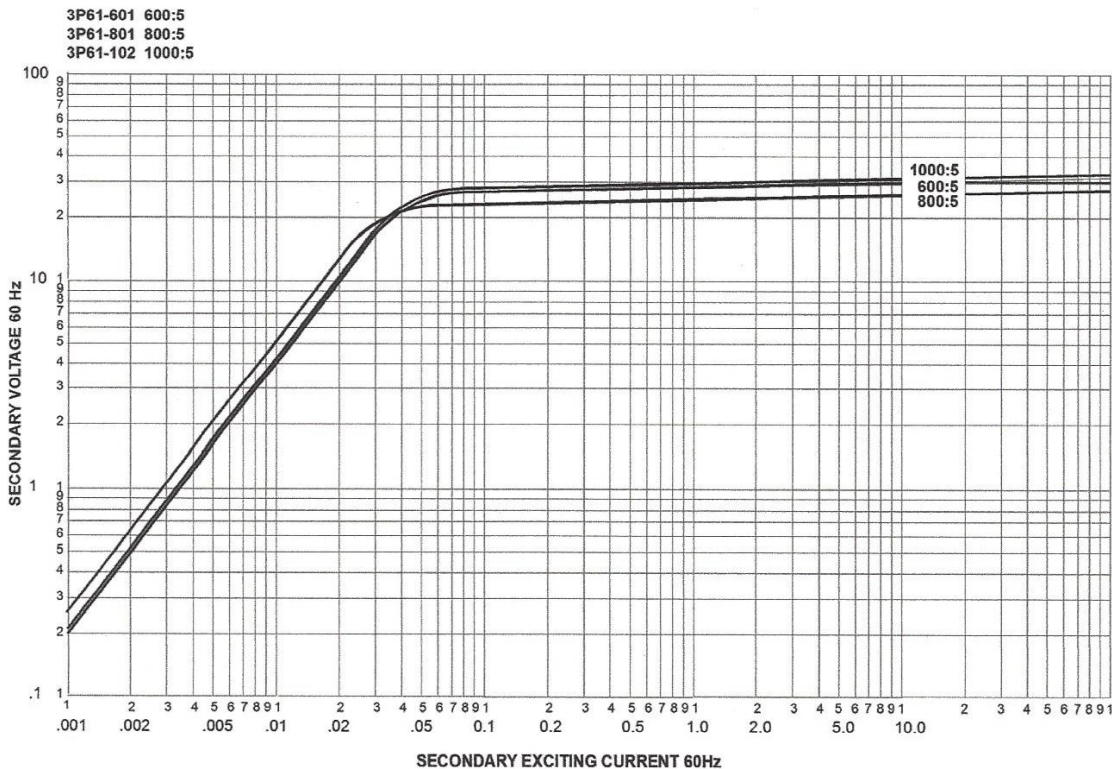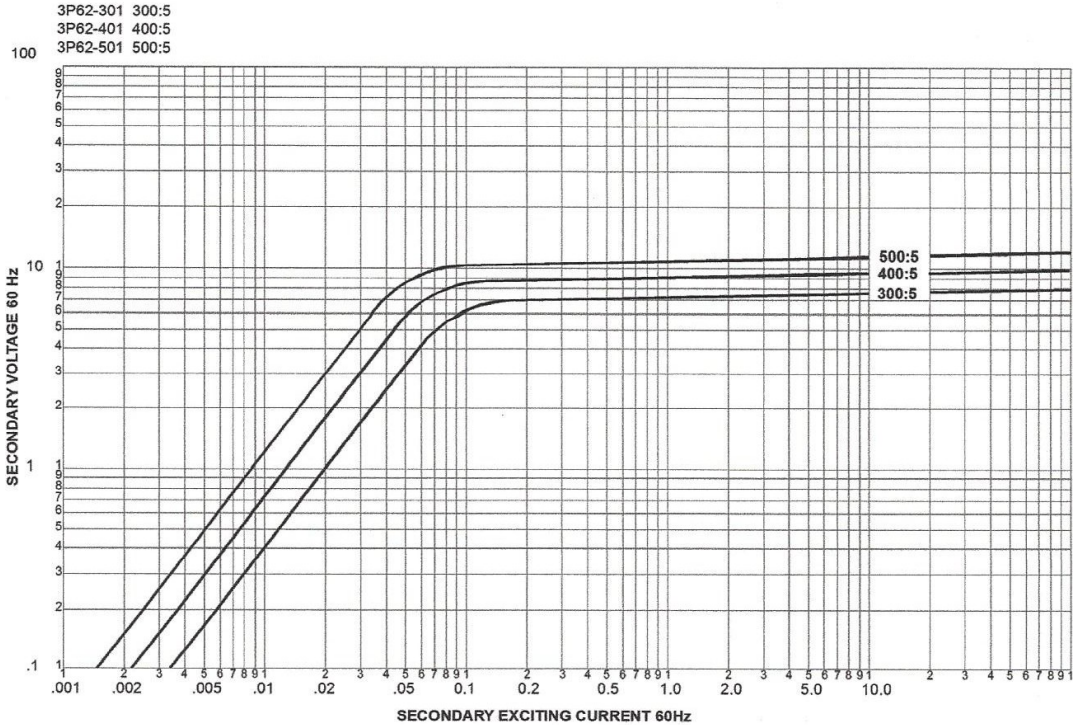

Rev F 06 12 2024